



Primo GEN24



Fronius Primo GEN24
& GEN24 Plus 3.0 - 10.0 kW

The heart of the photovoltaic system



01 Backup power for every situation

A reliable energy supply: the Fronius GEN24 offers just that with an integrated basic backup power function, the PV Point. With the Fronius GEN24 Plus, you can choose between the PV Point and the Full Backup option, which provides backup power for the entire home.

02 Built-in freedom

The Fronius GEN24 and Fronius GEN24 Plus have open interfaces. This makes it easy to integrate components from Fronius or third-party suppliers for a tailor-made photovoltaic system.

03 Versatility as standard

More functions. More control. More power. Thanks to their energy management functions, the Fronius GEN24 and Fronius GEN24 Plus continuously save time and money. What's more, the integrated active cooling extends the service life of the inverter, protecting your investment for many years to come.

04 Sustainably future-proof

For those who don't want to decide right away: With the Fronius UP.storage* software upgrade, the Fronius GEN24 can be retrofitted with a battery connection and therefore the Full Backup power supply at any time.

05 Maximum independence

By combining the Fronius GEN24 Plus with a battery, you can get even more out of your photovoltaic system, even at night. Use more of your own electricity and become more independent of electricity providers and prices.

* Available in the Fronius webshop in selected countries.



The Fronius GEN24 is available in two versions:

- As an inverter: **Fronius GEN24**
integrated backup power function
- As a hybrid inverter: **Fronius GEN24 Plus**
battery connection
two backup power options



Sustainable, reliable, future-proof:

With our Fronius GEN24 inverter at the heart of the photovoltaic system, energy can be generated flexibly and inexpensively. The Fronius GEN24 Plus hybrid inverter even allows a battery storage system to be connected, so the solar energy generated can be used for electricity, heating, cooling, and e-mobility even at night. Full solar power for the private energy revolution with the Fronius GEN24 and the Fronius GEN24 Plus. Designed to empower.

Technical data

3.0/3.6/4.0 kW

		Primo GEN24/GEN24 Plus								
		3.0		3.6		4.0				
Input data	Number of MPP trackers		2			2				
	DC input voltage range (Udc min - Udc max)	V	65 - 600			65 - 600				
	Rated input voltage (Udc,r)	V	400		400		400			
	Feed-in start-up input voltage (Udc start)	V	80		80		80			
	Usable MPP voltage range	V	65 - 530		65 - 530		65 - 530			
	MPP voltage range (at rated power) (Umpp min - Umpp max)	V	190 - 530			200 - 530				
	Max. usable input current (Idc max)	A	MPPT1	MPPT2	MPPT1	MPPT2	MPPT1	MPPT2		
	Max. array short circuit current (Isc pv) ¹	A	22	12	22	12	22	12		
	Number of DC connections		41.25	22	41.25	22	41.25	22		
	Max. usable DC power	W	2	2	2	2	2	2		
	Max. PV generator output	Wpeak	MPPT1	MPPT2	Total	MPPT1	MPPT2	Total		
			3,110	3,110	3,110	3,810	3,810	4,140		
			3,750	3,110	4,500	4,600	3,810	5,520		
						5,000	4,140	6,000		
Output data	AC rated power (Pac,r)	W	3,000			3,680		4,000		
	Apparent power	VA	3,000			3,680		4,000		
	Max. output power	VA	3,000			3,680		4,000		
			220 Vac	230 Vac	220 Vac	230 Vac	220 Vac	230 Vac		
	Rated AC output current	A	13.6	13	16.7	16	18.2	17.4		
	Grid connection (Uac,r)	V	1~ NPE 220/230 (+20%/-30%)							
	Frequency (frequency range fmin - fmax)	Hz	50/60 (45 - 65)							
	Total harmonic distortion	%	< 2			< 2		< 2		
Output data PV Point	Power factor (cos φac,r)		0,8 - 1 ind. / cap.							
	Rated output power PV Point	VA	3,000			3,000		3,000		
	Grid connection PV Point	V	1~ NPE 220/230							
	Switching time	sec.	< 15			< 15		< 15		
Output data Full Backup ²	Full Backup power and battery function only available with GEN24 Plus		Primo GEN24 Plus							
			3.0		3.6		4.0			
	Rated output power Full Backup	VA	3,000			3,600		4,000		
	Grid connection Full Backup	V	1~ NPE 220/230							
	Switching time	sec.	~10			~10		~10		
Battery connection	Number of DC inputs		1		1		1			
	Max. input current (Idc max)	A	22		22		22			
	DC input voltage range (Udc min - Udc max) ³	V	150 - 455			150 - 455		150 - 455		
	DC battery connection technology		1x BATT+ and 1x BATT- push-in spring terminals 2.5 - 10 mm ²							
	Max. DC input/output power ⁴	W	3,110		3,810		4,140			
	Max. charging power for AC coupling ⁴	W	3,000		3,680		4,000			
	Compatible batteries ⁵		Fronius Reserva & BYD Battery-Box Premium HVS/HVM							

¹ $I_{sc\,pv} = I_{sc\,max} \geq I_{sc\,(STC)} \times 1,25$ according to e.g. IEC 60364-7-712, NEC 2020, AS/NZS 5033:2021.

² The Full Backup option is available for the Primo GEN24 3.0-10.0 Plus. Additional external components for grid switchover are required for the Full Backup. See the Operating Instructions for further details.

³ AC power derating of the inverter occurs with a DC battery input voltage of 419.7 V and higher

⁴ Depending on connected battery

⁵ Compatibility with the Fronius GEN24 Plus varies depending on the battery storage type and capacity class, country-specific certification and availability. More information: www.fronius.com/battery-overview

		Primo GEN24/GEN24 Plus		
		3.0	3.6	4.0
General data	Dimensions (height x width x depth)	mm	530 x 474 x 165	
	Weight (inverter/with packaging)	kg	15.4/19	15.4/19
	Protection class		IP 66	IP 66
	Safety class		1	1
	Night consumption	W	< 10	< 10
	Overtoltage category (DC/AC) ⁶		2/3	2/3
	Cooling		Active Cooling technology	
	Installation		Indoor and outdoor installation	
	Ambient temperature range	°C	-40 to +60	-40 to +60
	Permissible humidity	%	0 - 100	0 - 100
	Noise emissions	dB (A)	< 42	< 42
	Max. altitude above sea level	m	4,000	4,000
	DC connection technology PV		4x DC+ and 4x DC- push-in spring terminals 2.5 - 10 mm ²	
	AC connection technology		3-pin AC push-in spring terminals 2.5 - 10 mm ² 3-pin backup power push-in spring terminals 1.5 - 10 mm ² 2x PE screw terminals 2.5-16 mm ² and 3x 2.5 - 10 mm ²	
	Certificates and compliance with standards ⁷		IEC 62109, IEC 62909, AS/NZS 4777.2, CEI 0-21, ABNT BNR 16149 und 16150, IEC 62116, IEC 61727, G98/G99	
	Backup power functions ⁸		PV Point or Full Backup	
	Country of manufacture		Austria	
	Life cycle analysis		In accordance with ÖNORM EN ISO 14040 and 14044 (checked by employees from Fraunhofer IZM)	
Efficiency	Max. efficiency	%	97.6	97.6
	Euro. efficiency (ηEU)	%	96.8	97.0
	MPP adaptation efficiency	%	> 99.9	> 99.9
Protection devices	DC isolation measurement		Integrated	
	DC disconnector		Integrated	
	Reverse polarity protection		Integrated	
	AFCI - Arc Fault Detection (Arc Guard)		Integrated	
Interfaces	WLAN/2 x Ethernet LAN		Fronius Solar.web, Modbus TCP SunSpec, Fronius Solar API (JSON)	
	6 digital inputs 6 digital inputs/outputs		Connection to ripple control receiver, energy management	
	Emergency shut-off (WSD)		Integrated	
	Datalogger and web server		Integrated	
	2 x RS485		Modbus RTU SunSpec (third-party provider)/Fronius Smart Meter, battery (GEN24 Plus), Fronius Ohmpilot	

⁶ In line with IEC 62109-1. Option to retrofit surge protection device DC SPD type 1+2 for 2 MPP trackers available under the following item number: 4,240,313,CK

⁷ You can find the current certificates under www.fronius.com/primo-gen24-plus-cert

⁸ Full Backup power and battery function only available with GEN24 Plus

Technical data

4.6/5.0/6.0 kW

		Primo GEN24/GEN24 Plus								
		4.6		5.0		6.0				
Input data	Number of MPP trackers		2			2				
	DC input voltage range (Udc min - Udc max)	V	65 - 600			65 - 600				
	Rated input voltage (Udc,r)	V	400		400		400			
	Feed-in start-up input voltage (Udc start)	V	80		80		80			
	Usable MPP voltage range	V	65 - 530		65 - 530		65 - 480			
	MPP voltage range (at rated power) (Umpp min - Umpp max)	V	230 - 530			230 - 530				
	Max. usable input current (Idc max)	A	22	12	22	12	22	12		
	Max. array short circuit current (Isc pv) ¹	A	41.25	22	41.25	22	41.25	22		
	Number of DC connections		2	2	2	2	2	2		
			MPPT1	MPPT2	MPPT1	MPPT2	MPPT1	MPPT2		
Output data	Max. usable DC power	W	4,750	4,750	4,750	5,170	5,170	5,170		
	Max. PV generator output	Wpeak	5,750	4,750	6,900	6,250	5,170	7,500		
	AC rated power (Pac,r)	W	4,600			5,000				
	Apparent power	VA	4,600		5,000		6,000			
	Max. output power	VA	4,600			5,000				
			220 Vac	230 Vac	220 Vac	230 Vac	220 Vac	230 Vac		
Output data PV Point	Rated AC output current	A	20.9	20	22.7	21.7	27.3	26.1		
	Grid connection (Uac,r)	V	1~ NPE 220/230 (+20%/-30%)							
	Frequency (frequency range fmin - fmax)	Hz	50/60 (45 - 65)							
	Total harmonic distortion	%	< 2			< 2				
	Power factor (cos φac,r)		0,8 - 1 ind. / cap.							
Output data PV Point	Rated output power PV Point	VA	3,000		3,000		3,000			
	Grid connection PV Point	V	1~ NPE 220/230							
	Switching time	sec.	< 15		< 15		< 15			
Output data Full Backup ²	 Full Backup power and battery function only available with GEN24 Plus		Primo GEN24 Plus							
			4.6		5.0		6.0			
	Rated output power Full Backup	VA	4,600			5,000				
	Grid connection Full Backup	V	1~ NPE 220/230							
Battery connection	Switching time	sec.	~10		~10		~10			
	Number of DC inputs		1		1		1			
	Max. input current (Idc max)	A	22		22		22			
	DC input voltage range (Udc min - Udc max) ³	V	150 - 455			150 - 455				
	DC battery connection technology		1x BATT+ and 1x BATT- push-in spring terminals 2.5 - 10 mm ²							
	Max. DC input/output power ⁴	W	4,750		5,170		6,200			
	Max. charging power for AC coupling ⁴	W	4,600		5,000		6,000			
	Compatible batteries ⁵		Fronius Reserva & BYD Battery-Box Premium HVS/HVM							

¹ $I_{sc\,pv} = I_{sc\,max} \geq I_{sc\,(STC)} \times 1,25$ according to e.g. IEC 60364-7-712, NEC 2020, AS/NZS 5033:2021.

² The Full Backup option is available for the Primo GEN24 3.0-10.0 Plus. Additional external components for grid switchover are required for the Full Backup. See the Operating Instructions for further details.

³ AC power derating of the inverter occurs with a DC battery input voltage of 419.7 V and higher

⁴ Depending on connected battery

⁵ Compatibility with the Fronius GEN24 Plus varies depending on the battery storage type and capacity class, country-specific certification and availability. More information: www.fronius.com/battery-overview

		Primo GEN24/GEN24 Plus		
		4.6	5.0	6.0
General data	Dimensions (height x width x depth)	mm	530 x 474 x 165	
	Weight (inverter/with packaging)	kg	15.4/19	15.4/19
	Protection class		IP 66	IP 66
	Safety class		1	1
	Night consumption	W	< 10	< 10
	Overtoltage category (DC/AC) ⁶		2/3	2/3
	Cooling		Active Cooling technology	
	Installation		Indoor and outdoor installation	
	Ambient temperature range	°C	-40 to +60	-40 to +60
	Permissible humidity	%	0 - 100	0 - 100
	Noise emissions	dB (A)	< 42	< 42
	Max. altitude above sea level	m	4,000	4,000
	DC connection technology PV		4x DC+ and 4x DC- push-in spring terminals 2.5 - 10 mm ²	
	AC connection technology		3-pin AC push-in spring terminals 2.5 - 10 mm ² 3-pin backup power push-in spring terminals 1.5 - 10 mm ² 2x PE screw terminals 2.5-16 mm ² and 3x 2.5 - 10 mm ²	
	Certificates and compliance with standards ⁷		IEC 62109, IEC 62909, AS/NZS 4777.2, CEI 0-21, ABNT BNR 16149 und 16150, IEC 62116, IEC 61727, G98/G99	
	Backup power functions ⁸		PV Point or Full Backup	
	Country of manufacture		Austria	
	Life cycle analysis		In accordance with ÖNORM EN ISO 14040 and 14044 (checked by employees from Fraunhofer IZM)	
Efficiency	Max. efficiency	%	97.6	97.6
	Euro. efficiency (ηEU)	%	97.2	97.1
	MPP adaptation efficiency	%	> 99.9	> 99.9
Protection devices	DC isolation measurement		Integrated	
	DC disconnector		Integrated	
	Reverse polarity protection		Integrated	
	AFCI - Arc Fault Detection (Arc Guard)		Integrated	
Interfaces	WLAN/2 x Ethernet LAN		Fronius Solar.web, Modbus TCP SunSpec, Fronius Solar API (JSON)	
	6 digital inputs 6 digital inputs/outputs		Connection to ripple control receiver, energy management	
	Emergency shut-off (WSD)		Integrated	
	Datalogger and web server		Integrated	
	2 x RS485		Modbus RTU SunSpec (third-party provider)/Fronius Smart Meter, battery (GEN24 Plus), Fronius Ohmpilot	

⁶ In line with IEC 62109-1. Option to retrofit surge protection device DC SPD type 1+2 for 2 MPP trackers available under the following item number: 4,240,313,CK

⁷ You can find the current certificates under www.fronius.com/primo-gen24-plus-cert

⁸ Full Backup power and battery function only available with GEN24 Plus

Technical data

8.0/10.0 kW

Primo GEN24/GEN24 Plus							
		8.0		10.0			
Input data	Number of MPP trackers		2		2		
	DC input voltage range (Udc min - Udc max)	V	65 - 600		65 - 600		
	Rated input voltage (Udc,r)	V	400		400		
	Feed-in start-up input voltage (Udc start)	V	80		80		
	Usable MPP voltage range	V	65 - 480		65 - 480		
	MPP voltage range (at rated power) (Umpp min - Umpp max)	V	260 - 480		260 - 480		
			MPPT1	MPPT2	MPPT1	MPPT2	
	Max. usable input current (Idc max)	A	22	22	22	22	
	Max. array short circuit current (Isc pv) ¹	A	41.25	41.25	41.25	41.25	
	Number of DC connections		2	2	2	2	
Output data		MPPT1	MPPT2	Total	MPPT1	MPPT2	Total
	Max. usable DC power	W	8,260	8,260	8,260	10,360	10,360
	Max. PV generator output	Wpeak	10,000	10,000	12,000	12,500	15,000
	AC rated power (Pac,r)	W	8,000			9,999	
	Apparent power	VA	8,000			9,999	
	Max. output power	VA	8,000			9,999	
Output data PV Point		220 Vac	230 Vac	220 Vac	230 Vac		
	Rated AC output current	A	36.4	34.8	45.5	43.5	
	Grid connection (Uac,r)	V		1~ NPE 220/230 (+20%/-30%)			
	Frequency (frequency range fmin - fmax)	Hz		50/60 (45 - 65)			
	Total harmonic distortion	%	< 3		< 3		
	Power factor (cos φac,r)			0,8 - 1 ind. / cap.			
Output data Full Backup ²	Rated output power PV Point	VA	3,000		3,000		
	Grid connection PV Point	V		1~ NPE 220/230			
	Switching time	sec.	~15		~15		
 Full Backup power and battery function only available with GEN24 Plus			Primo GEN24 Plus				
		8.0		10.0			
Output data Full Backup ²	Rated output power Full Backup	VA	8,000		9,999		
	Grid connection Full Backup	V		1~ NPE 220/230			
	Switching time	sec.	~10		~10		
Battery connection	Number of DC inputs		1		1		
	Max. input current (Idc max)	A	22		22		
	DC input voltage range (Udc min - Udc max) ³	V	150 - 455		150 - 455		
	DC battery connection technology		1x BATT+ and 1x BATT- push-in spring terminals 2.5 - 10 mm ²				
	Max. DC input/output power ⁴	W	8,260		10,360		
	Max. charging power for AC coupling ⁴	W	8,000		9,999		
	Compatible batteries ⁵		Fronius Reserva & BYD Battery-Box Premium HVS/HVM				

¹ $I_{sc\,pv} = I_{sc\,max} \geq I_{sc\,(STC)} \times 1,25$ according to e.g. IEC 60364-7-712, NEC 2020, AS/NZS 5033:2021.

² The Full Backup option is available for the Primo GEN24 3.0-10.0 Plus. Additional external components for grid switchover are required for the Full Backup. See the Operating Instructions for further details.

³ AC power derating of the inverter occurs with a DC battery input voltage of 419.7 V and higher

⁴ Depending on connected battery

⁵ Compatibility with the Fronius GEN24 Plus varies depending on the battery storage type and capacity class, country-specific certification and availability. More information: www.fronius.com/battery-overview

		Primo GEN24/GEN24 Plus	
		8.0	10.0
General data	Dimensions (height x width x depth)	mm	595 x 529 x 180
	Weight (inverter/with packaging)	kg	21 / 26
	Protection class		IP 66
	Safety class		1
	Night consumption	W	<10
	Overshoot category (DC/AC) ⁶		2/3
	Cooling		Active Cooling technology
	Installation		Indoor and outdoor installation
	Ambient temperature range	°C	-40 to +60
	Permissible humidity	%	0 - 100
	Noise emissions	dB (A)	< 51
	Max. altitude above sea level	m	4,000
	DC connection technology PV		4x DC+ and 4x DC- push-in spring terminals 2.5 - 10 mm ²
	AC connection technology		3-pin AC push-in spring terminals 2.5 - 16 mm ² 3-pin backup power push-in spring terminals 1.5 - 10 mm ² 2x PE screw terminals 2.5-16 mm ² and 3x 2.5 - 10 mm ²
	Certificates and compliance with standards ⁷		IEC 62109, IEC 62909, AS/NZS 4777.2, IEC 62116, IEC 61727 ABNT BNR 16149 und 16150, IEC 62116, IEC 61727
	Backup power functions ⁸		PV Point or Full Backup
	Country of manufacture		Austria
	Life cycle analysis		In accordance with ÖNORM EN ISO 14040 and 14044 (checked by employees from Fraunhofer IZM)
Efficiency	Max. efficiency	%	97.3
	Euro. efficiency (ηEU)	%	96.9
	MPP adaptation efficiency	%	> 99.9
Protection devices	DC isolation measurement		Integrated
	DC disconnector		Integrated
	Reverse polarity protection		Integrated
	AFCI - Arc Fault Detection (Arc Guard)		Integrated
Interfaces	WLAN/2 x Ethernet LAN		Fronius Solar.web, Modbus TCP SunSpec, Fronius Solar API (JSON)
	6 digital inputs 6 digital inputs/outputs		Connection to ripple control receiver, energy management
	Emergency shut-off (WSD)		Integrated
	Datalogger and web server		Integrated
	2 x RS485		Modbus RTU SunSpec (third-party provider)/Fronius Smart Meter, battery (GEN24 Plus), Fronius Ohmpilot

⁶ In line with IEC 62109-1. Option to retrofit surge protection device DC SPD type 1+2 for 2 MPP trackers available under the following item number: 4,240,313,CK




⁷ You can find the current certificates under www.fronius.com/primo-gen24-plus-cert

⁸ Full Backup power and battery function only available with GEN24 Plus




Impressive Power Data

The Fronius GEN24 and Fronius GEN24 Plus impress with premium efficiency and maximum power at high temperatures.

Efficiency

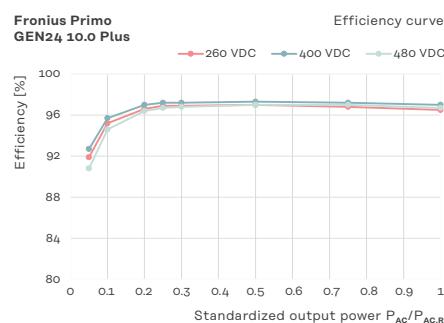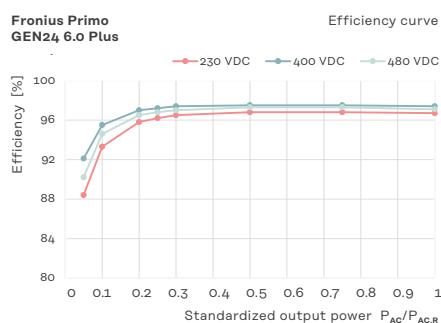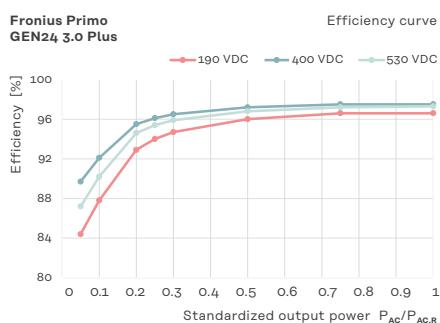

Power derating

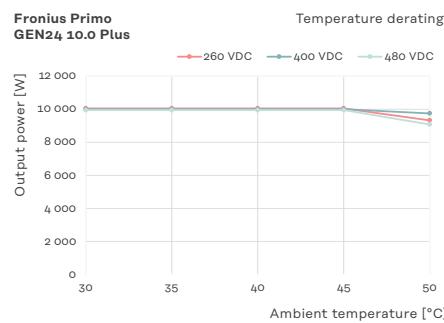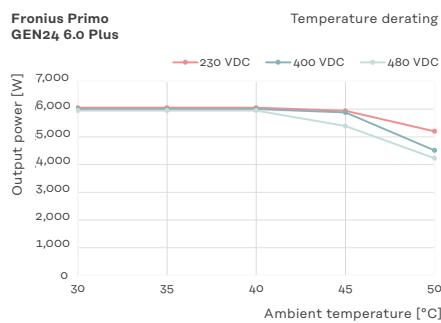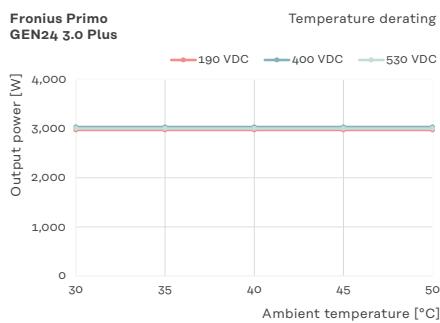



Multi-award-winning

Impressive efficiency

For the fifth time in a row, the Fronius GEN24 Plus and BYD Battery-Box Premium have proven to be among the most efficient solutions in the Energy Storage Inspection 2024. The Energy Storage Inspection is carried out annually by HTW Berlin and is considered Europe's most important study on the efficiency of PV storage systems.





Reserva

One-stop-shop

Fronius now offers all the components for 24 hours of sun - a complete PV system from a single source. Electricity, heating, cooling, e-mobility – everything is possible with GEN24 Plus, even at night. The battery-enabled inverter is perfectly matched to the Fronius storage solution, Reserva, and makes you even more independent.



The Fronius storage solution

Make yourself independent and utilise solar energy around the clock. The Fronius Reserva is a high-voltage battery with DC coupling that guarantees particularly effective and efficient energy transfer. With capacities from 6.3 to 15.8 kWh, it adapts flexibly to your needs.



Backup power for every eventuality

With the Fronius Backup Controller, you can switch to full backup power operation automatically. The cost-effective switching component can be installed in the control cabinet to save space and eliminate the need for additional hardware such as switch boxes.



Charge electric cars intelligently and flexibly

With the Fronius Wattpilot, you can charge your electric car wherever you are – at home or on the move. The smart wallbox adapts to your needs and offers two versions: Home for fixed installation and Go as a portable solution. Both allow sustainable charging with solar energy or green electricity from the grid. Whether you have a PV system or not, the Fronius Wattpilot helps you charge cost-effectively and in an environmentally friendly way.

For further information, please visit: www.fronius.com.au/gen24

Fronius Australia Pty Ltd.
90-92 Lambeck Drive
Tullamarine VIC 3043
Australia
sales.australia@fronius.com
www.fronius.com.au

Fronius International GmbH
Froniusplatz 1
4600 Wels
Austria
pv-sales-austria@fronius.com
www.fronius.com

Text and illustrations were accurate at the time of printing.
Fronius reserves the right to make changes. All information published in this document, despite exercising the greatest care in its preparation, is subject to change. No legal liability is accepted. Copyright © 2025 Fronius™. All rights reserved.