

# KIRI SATINJET ULTRA LOW FLOW SHOWER HEAD/HANDSET INSTALLATION GUIDE

## TECHNICAL SPECIFICATIONS

### Operating Pressure:


Min 1 bar, Max 5 bar.  
If supply exceeds 5 bar a pressure limiting valve must be installed.

### Operating Temperature:

Max 70°C.

### Notes:

- After installation all connections must be checked for leaks.
- All installations must be carried out in compliance with relevant water regulations.

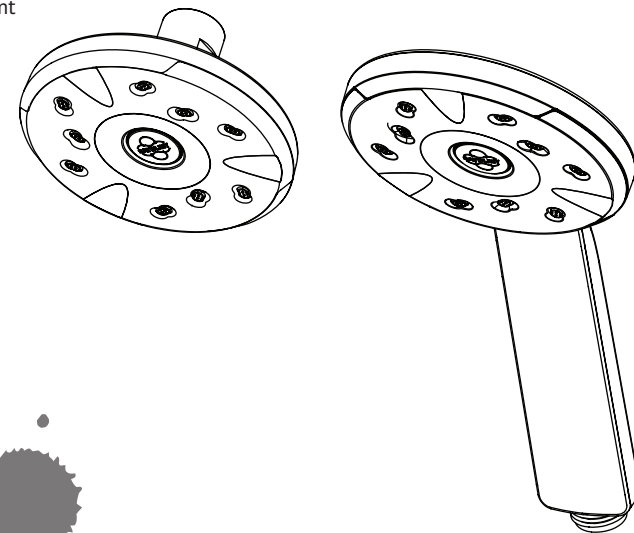

Methven warrants this product against manufacturing defects and that it is suitable for use under the operating conditions specified in this instruction sheet.

For your warranty please refer to [www.methven.com](http://www.methven.com) or call Customer Service


New Zealand  
0800 804 222

Australia  
1300 638 483

UK  
0800 195 1602




### ULTRA LOW FLOW HANDSET INSTALLATION

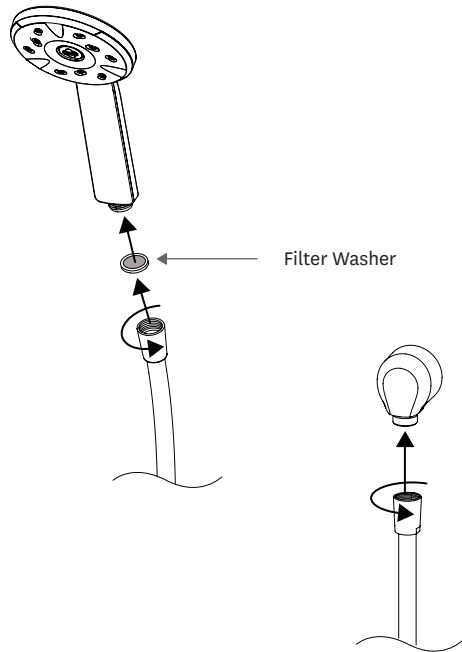

Remove existing handset from hose. Insert the filter washer into the hose before screwing to Kiri Ultra Low Flow Handset.

### ULTRA LOW FLOW SHOWER HEAD INSTALLATION

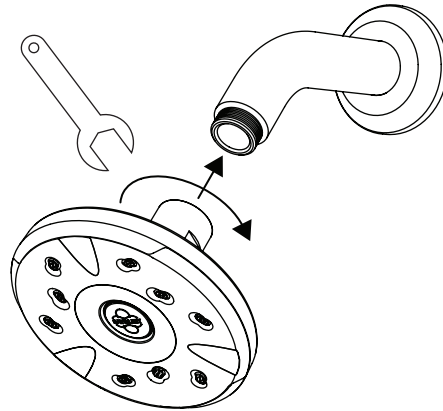

Remove existing shower head from arm. Remove cap from Kiri Ultra Low Flow Handset shower head. Screw shower head onto arm. Straighten shower head so it is in the correct orientation.

### CLEANING

Water contains lime which remains on the surface after the water has evaporated. These lime deposits can be prevented from forming by wiping immediately after use.

To clean the chrome-plated surfaces use a soft cloth, soap and warm water. Never use cleaning agents that contain a corrosive acid or a scouring additive.

